



# CJS-DI

Jet sweeper



The CJS-DI is a compact sweeper/blower unit with an additional mounted spreader, sprayer or de-icer. A snow plough is mounted at the front, while the sweeping unit and high-performance blowing nozzle are located between the axles and the de-icer at the rear. The CJS-DI is a multi-functional machine that reliably clears aircraft stands, taxi-ways, runways and aprons. It is mounted on a standard truck chassis for maximum manoeuvrability.

## Highlights

- Agile **multi-functional sweeper**
- **Reliable snow removal at high clearing speeds**
- Efficient clearance and de-icing thanks to intelligent **assistance systems**
- **Tailor-made options**


## Your benefits

- Optimised driving comfort and fatigue-free working thanks to **hydropneumatic chassis**.
- **Low service time due to easy access components.**
- Intuitive operation thanks to **integrated control panel for synchronous control** of the snow plough, broom, blower and the mounted spreader/sprayer.
- The plough and mounted spreader/sprayer can be operated independently from the broom and blower.

We know how important it is that your machines and equipment are always ready to deploy. **Get in touch with us** about our range of tailored services and original spare parts.



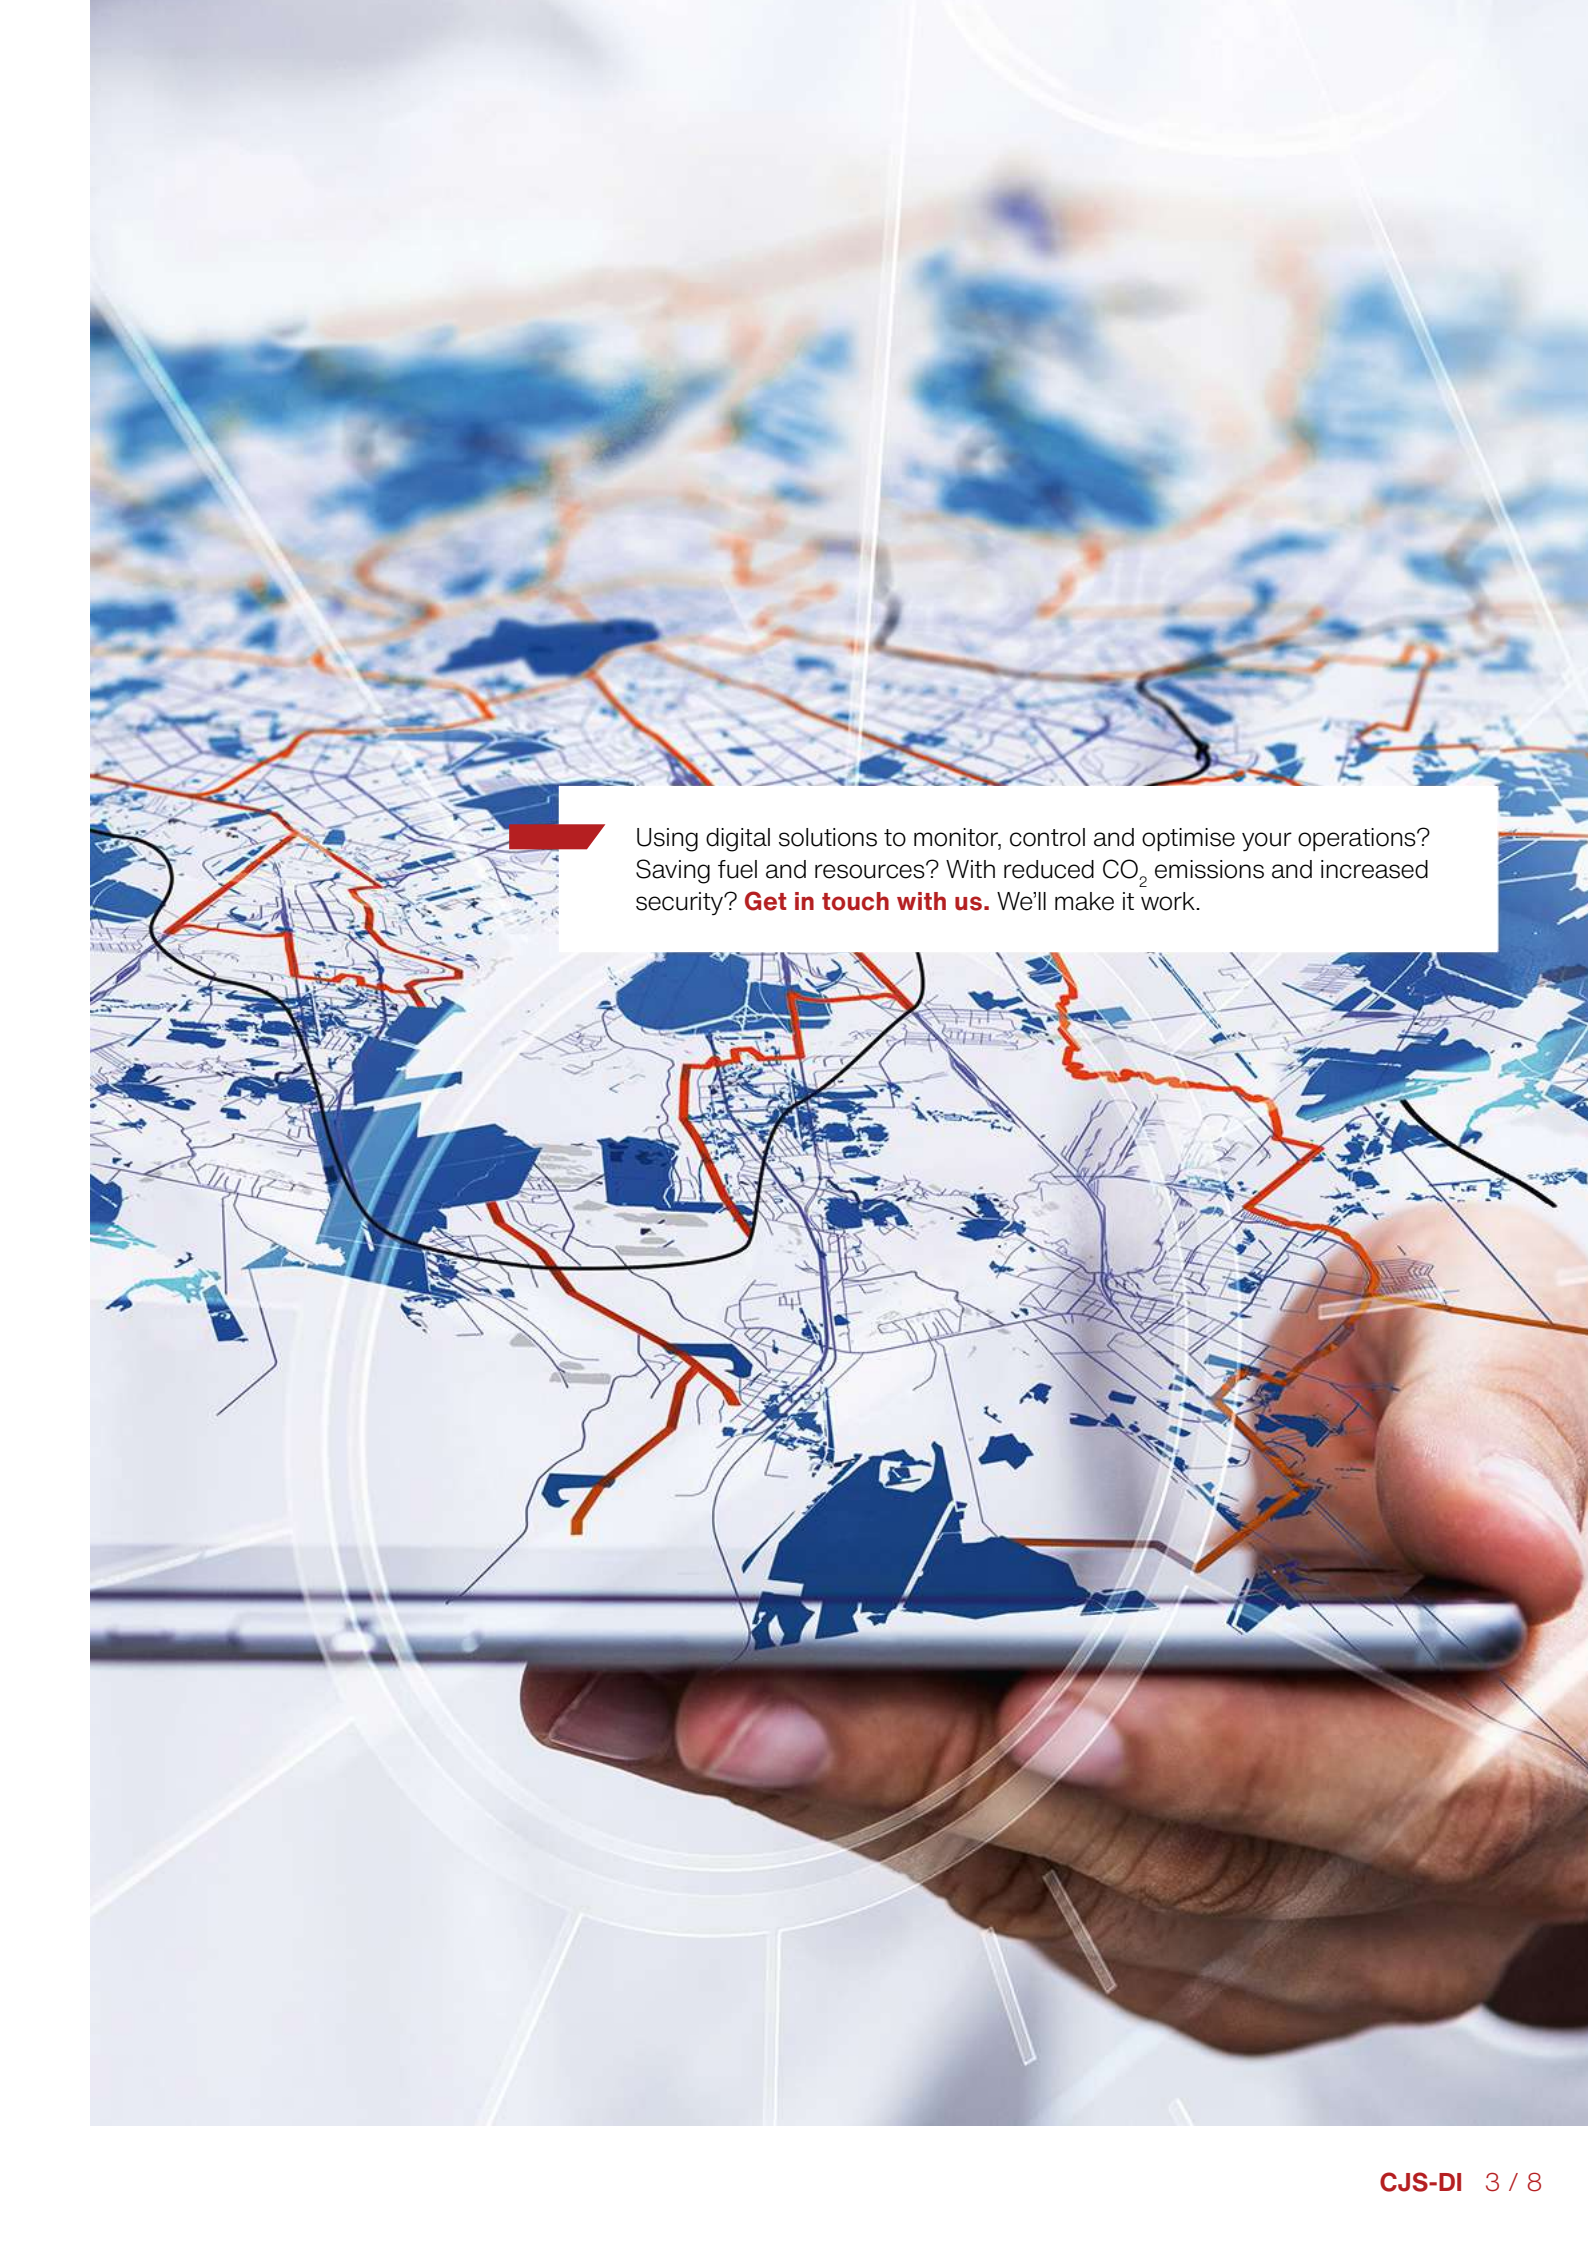

A hand holding a smartphone displaying a map with orange and blue routes, overlaid with a white text box.

Using digital solutions to monitor, control and optimise your operations? Saving fuel and resources? With reduced CO<sub>2</sub> emissions and increased security? **Get in touch with us.** We'll make it work.

## Performance features

### Chassis

Standard MAN carrier vehicles are used for the CJS-DI with the chassis being specially converted to accommodate the sweeper blower.

### Snow plough

Clean and aggressive clearance is achieved with the Schmidt MS Tarron airport snow ploughs, such as the MS 56.1 NA. These are designed for fast snow clearance at airports and offer outstanding performance with optional fine clearing bar, ejection stop or low blade shape.



### Sweeping unit

The sweeping unit is mounted between the axles of the vehicle. Twin trailing wheels ensure optimum, quiet and even broom sweeping performance. Automatic spoiler adjustment, aerodynamic snow guidance and wear-dependent brush speed control ensure that the snow is ejected to the side and outstanding clearing is achieved - the basis for safety on runways. The automatic and infinitely variable sweeping mirror adjustment enables the brush profile to be worn evenly, and as little as possible, to considerably reduce maintenance costs.



### Blower unit

An aerodynamic fan unit is fitted in front of the rear axle to deliver optimum cleaning of the clearing area with maximum blowing power and optimum friction values. With constant air speed over the entire working width, a uniform clearing result can be achieved.



### Mounted spreader/sprayer

With the spreader/sprayer, de-icing can be delivered both preventively and curatively. The entire vehicle width is covered by a spray bar, while further working widths can be achieved with additional jet nozzles. The drive for the spreader/sprayer is provided by the carrier vehicle's hydraulics.





## Drive

The hydraulic pumps for operating and controlling the sweeping unit and high-pressure fan are powered by an auxiliary motor which delivers 260kW at 1800rpm. The snow plough and the mounted sprayer/spreader are controlled by a hydraulic system driven by the carrier vehicle's engine.

## Hydropneumatic running gear

The CJS-DI's hydropneumatic chassis offers the operator additional comfort in the field.

## Control concept

The CJS-DI is controlled via an intuitive interface with an integrated control panel for operating the snow plough, brush, blower and rear mounted spreader/sprayer. The colour graphic display and synchronous control of all components allow fast and reliable operation of the working functions. The parameters can be fine-tuned to meet the customer's needs, allowing the driver to concentrate on driving and achieving the best possible clearing performance.



## Maintenance

All important components are readily accessible, making maintenance and servicing easy and straightforward, and resulting in short service time and high machine availability.



## Gallery



## Related products

### ACE

Combination machine



### TJS / TJS-C

Jet sweeper



### CJS

Jet sweeper



Trust in our many years of uniquely diverse experience. **Get in touch with us.** We'll find the right solution for your specific challenge.





## Technical data

### Sweeping unit

Brush length	4,200 mm
Number of Cartridges / brush material / diameter	16-, 18- o. 21-piece steel, poly and mixed bristles Ø 914 mm

### Working speed

Working speed up to	60 km/h
---------------------	---------

### Drive system - auxiliary engine 2

Motor type	Mercedes Benz OM 936 LA
Exhaust emission	EuroMot V
Performance	260 kW (354 HP) @ 1,800 1/min
Fuel tank	600 l
Working hours, depending on the operating conditions	8 h - 10 h

### Optional sprayer

Filling volume	5,000 l
Spraying width	15,000 mm
Distribution system	Ejection & spray nozzles

### Optional spreader

Filling volume	customized
Spreading width (solid) approx.	24,000 mm
Spraying width (liquid) approx.	15,000 mm
Distribution system	TwinDisk

### Carrier vehicle

Carrier vehicle type	MAN TGS 18.360
----------------------	----------------

### Example dimensions

Length including snow plough MS 56.1 / 56.1 N in working position	14,730 mm
Length without snow plough	13,035 mm
Transport width including snow plough MS 56.1 / 56.1 N in working position	4,750 mm
Height (excl. rotary beacon)	3,700 mm
Sweeping width at 32° positioning angle	3,560 mm

### Example Weights

Total weight incl. vehicle	28,000 kg
----------------------------	-----------



© Aebi Schmidt Group  
www.aebi-schmidt.com

Aebi Schmidt Holding AG  
CH-8050 Zurich, Switzerland

All rights reserved. Technical data is  
subject to change.  
Illustrations are not binding. Errors and  
amendments excepted.

Document created on 11 FEB 2024

