



# Super-V3

Snow plough



The Meyer® Super-V3™ is your go-to solution for commercial-grade snow removal. It's not about pushing snow; it's about having options at your fingertips. With a simple touch, the Super-V3 shifts from V to scoop or straight blade configuration to handle the changing needs of clearing large parking lots and streets. The Super-V3 is designed for ¾-ton and larger pickup trucks, and we offer the Super-V3 LD carbon steel version for ½-ton pickups with a snow plow prep package.

## Highlights

- Available in a **variety of sizes for use with most ¾-ton or ½-ton trucks.**
- **Center-punched cutting edges** allow flipping for extended life.
- Tapered steel or stainless-steel moldboard offering **V, scoop, or straight blade configurations.**
- **Tapered moldboard** for optimal snow clearing and throwing
- Nite Saber® LED lights offer superior **visibility during the darkest nights.**

## Your benefits


- **User-Friendly:** Self-diagnostics and Hands-free Plo-wing (HFP) let users safely focus on the task at hand.
- **Efficient:** Locking double-acting cylinders for efficient back-dragging.
- **Smooth:** Innovative trip-edge moldboards minimize load loss and jarring.
- **Peace of Mind:** Rest easy with our industry-leading 5-year warranty, the best in the business

## Performance features

### Plow blade

Meyer Super-V3 plows are crafted for efficiency. Tapered wings ensure swift and thorough snow clearing. The trip-edge moldboards let only the lower portion yield upon impact, preserving the load and minimizing shock to the truck and driver. Behind the blade, a robust tubular steel A-frame adds strength, while continuously-welded outside ribs increase performance. Slot and tab construction ensures a precise, trouble-free fit, with laser-cut steel components assembled by robotic welders.

A sealed rubber deflector located between the two wings helps keep snow off the windshield, and pre-drilled holes make adding a snow deflector on the wings super easy. The carbon steel Super-V3 is sealed with Dura-Slick™ paint at the factory to prevent rust, while the stainless-steel versions are powder-coated with Dura-Slick™ paint with Teflon® for superior snow rolling action.

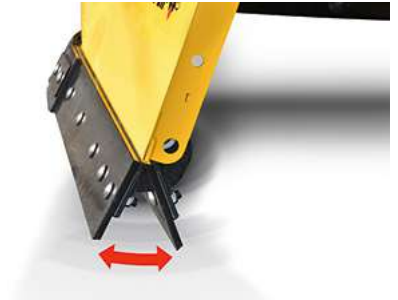

### Operating system

The Super-V3 features our Standard Operating System helps set the bar for industry-leading ground clearance. An encased power unit, adjustable drop speed, and a pistol grip controller with hands-free plowing, diagnostics, and double-click technology round out the feature set. Need to adjust the moldboard? Double-click a button, and it effortlessly completes the movement without the need for continuous pressing. Standard Nite Saber® LED lights ensure superior night vision to help you get the job done quickly, completely, and efficiently.



## Gallery







## Related products

**Lot Pro**  
Snow plough



**Diamond Edge**  
Snow plough



**Super Blade**  
Snow plough



## Technical data

|                              | SV3 LD 7'6"       | SV3 8'6"          | SV3 9'6"          |
|------------------------------|-------------------|-------------------|-------------------|
| <b>Dimensions</b>            |                   |                   |                   |
| Plough height centre         | 749 mm            | 749 mm            | 749 mm            |
| Plough height right and left | 950 mm            | 972 mm            | 972 mm            |
| Clearing width               | 2,057 mm V-shaped | 2,235 mm V-shaped | 2,515 mm V-shaped |
| Total width                  | 2,286 mm          | 2,591 mm          | 2,896 mm          |

|                |        |        |        |
|----------------|--------|--------|--------|
| <b>Weights</b> |        |        |        |
| Approx weight  | 297 kg | 392 kg | 411 kg |

|                              | SV3 10'6"         | SSV3 8'6"         | SSV3 9'6"         |
|------------------------------|-------------------|-------------------|-------------------|
| <b>Dimensions</b>            |                   |                   |                   |
| Plough height centre         | 749 mm            | 749 mm            | 749 mm            |
| Plough height right and left | 1,029 mm          | 972 mm            | 972 mm            |
| Clearing width               | 2,769 mm V-shaped | 2,235 mm V-shaped | 2,515 mm V-shaped |
| Total width                  | 3,200 mm          | 2,591 mm          | 2,896 mm          |

|                |        |        |        |
|----------------|--------|--------|--------|
| <b>Weights</b> |        |        |        |
| Approx weight  | 480 kg | 449 kg | 474 kg |

|                              | SSV3 10'6"        |
|------------------------------|-------------------|
| <b>Dimensions</b>            |                   |
| Plough height centre         | 479 mm            |
| Plough height right and left | 1,029 mm          |
| Clearing width               | 2,769 mm V-shaped |
| Total width                  | 3,200 mm          |

|                |        |
|----------------|--------|
| <b>Weights</b> |        |
| Approx weight  | 536 kg |



© Aebi Schmidt Group  
www.aebi-schmidt.com

Aebi Schmidt Holding AG  
CH-8050 Zurich, Switzerland

All rights reserved. Technical data is subject to change.  
Illustrations are not binding. Errors and amendments excepted.

Document created on 7 OCT 2024

