

# Used machines offer

## STRATOS S70-36 COMBI - Ex DEMO Spreader S7

Offer number: UM3434936

 aebi schmidt  
group




Brand: Schmitt  
Mat.-Nr.: 1323021-0  
Year of manufacture: 2020  
Serialnumber: S3S11254  
Running hours: 5 h  
Mileage: 5 km  
Condition: Class 5  
Location: Germany  
79837 St. Blasien

Price: **On request**

Stratos spreader are compatible with most carrier vehicles. The intuitive operation and outstanding performance of the Stratos guarantees an intelligent and efficient winter maintenance operation.

### Gallery

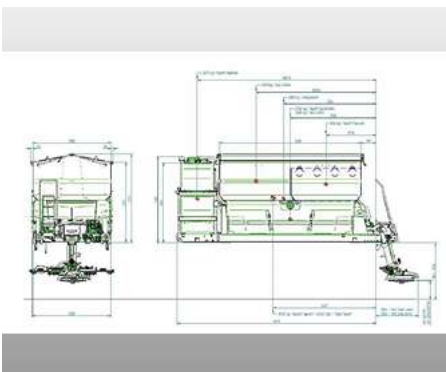

## Equipment

### Basic machine

SSR	STRATOS S 70 (36) Combi Soliq WSP „FLEX high“ unfolded: 5.3 m3 container, 7300 liter tank
Required loading length	6.70m.
Spreader body length	5100mm.
Curb weight	3085 kg.
Center of gravity	approximately 1020 from the front of the funnel
Platform height fully loaded	1470mm

### Container assemblies

163678	Screw conveyor („S“)
175636	Protective grille 40x40 mm, steel (series for „Flex“ Combi)
753348	Folding roof professional, steel (for „Flex“ Combi)
707146	Container in orange RAL2011 (series)
840392	Rear cover stainless steel
889378	Contour marking according to UN ECE R48 guideline

### Wet salt modules

378527	Front tank with 2500 l and 2 side tanks with a total of 1850 l, a total of 4350 l
198159	Wet salt system according to EN15597-1 2009 Min. and Max. level and scale
890156	Wet salt coupling Storz 3“
388150	Float switch maximum level, 4-pole (part of EN set)
536469	Float switch minimum level (part of EN set)
	Max volume wet 8400l

### Drive

632887	Drive via vehicle hydraulics („V“)
277835	Connections at the front of the device (for V)
678326	Quantity recording for load sensing pump (for V)
619528	Hydraulic couplings leak-free ISO16028, P=Gr.2(M) R=Gr.3(M)
920050	Mini measuring connection on the valve block, without pressure gauge

### Steering

270408	Evolution Smart „ES“ control system, with color touchscreen
673710	Combi „Percentage Control“ Liquid is always a percentage of the total dosage amount
515636	RS232/plow signal interface (with 19-pin EP/ES control panel cable)
271071	ThermoLogic (for ES) mounted at the rear of the device   Operating System Units of Measurement International Metric   Language of the control panel German   Language of the control panel German   RS232 protocol EN 15430-1 protocol   Direct plow signal Yes

### Distribution system

721699	Spreading plate „660“ (spreading width 3 - 12 m)
920051	Spray width adjustable per 1/4 lane
143517	Optical scatter control
888437	Spread control via headlights in red (bulb) or white (halogen, only 24 volts)
Spreading width	CS-General width= 3-12m. Auger only WSP=0.9-12m 660mm
Diffuse	control via headlights White

### Storage and fastening parts

119936	Base frame for storage feet for setting down up to 12 t. or solid structure
952336	Storage feet (4 pcs.) 12 tons, hydr. operated, including side supports

### Special equipment

830120	Rotating beacon with LED lamp (2 pieces)
407687	Tail light
153795	Warning foil red and white, at the top of the container
781199	Marking „Winter Service“ (German)
756782	Splash guard 2,200 mm

### Customer special equipment

XPST4064	Tail light with indicators, brake light and reflector (2 pieces)
XPST4206	folding wind spotlight
XPST4368	Electronic fill level display of the brine tanks in the control panel.

---

**Other options**

Center of gravity full (S.G.-solid/S.G.-liquid) | from the front of the container 1064 mm. | from loading area 1020 mm.

---

## **Contact**

Thomas Stoll  
Sales Back Office  
Phone: +49 5119 788 629  
E-Mail: [thomas.stoll@aebi-schmidt.com](mailto:thomas.stoll@aebi-schmidt.com)



Aebi Schmidt Holding AG  
Leutschenbachstrasse 52  
CH-8050 Zurich, Switzerland  
Phone.: +41 44 308 58 00  
[www.aebi-schmidt.com](http://www.aebi-schmidt.com)

© Aebi Schmidt Group  
All rights reserved.  
Technical data is subject to change.  
Illustrations are not binding.  
Errors and amendments excepted.

Document created on 24 FEB 2025

